


MONUMENT RECORD

Corner ID: **CICr_E07**



Quarter Corner

Sections 07 & 08- T07N-R01W, 2nd P.M.
Clear Creek Township, Monroe County, Indiana



MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)
0.65' x 0.65' cut limestone with drill hole found 0.6' above grade.

MONUMENT LOCATION SKETCH:

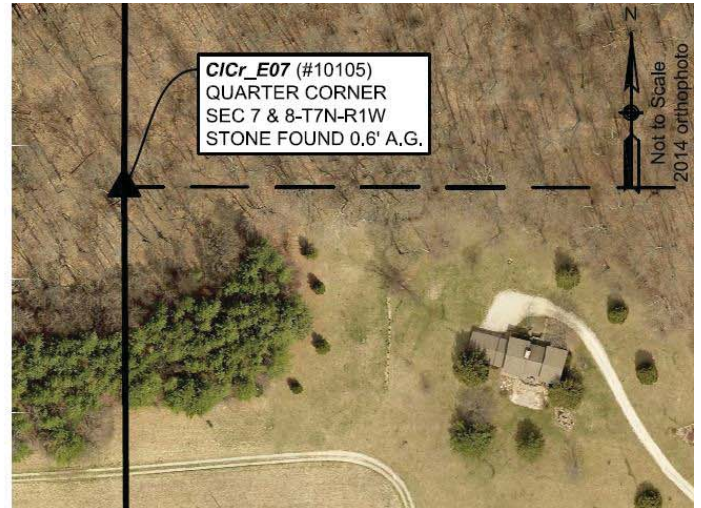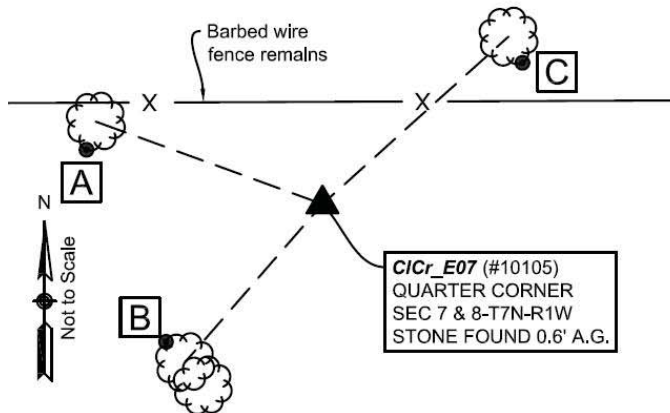

WITNESS MONUMENT TIES: All ties to new Bearing Trees (BTs) are a mag nail set in a 2" metal shiner and hack mark at the root crown (less than 12" above ground) perpendicular to the center of the tree, unless otherwise noted. BT diameters are noted as dbh and are measured approximately 4.5' above ground. Bearings are measured from the monument to the center of the BT, distances are measured from the monument to the mag nail. Distances to witness ties were collected with a 100' cloth tape.

ID	Bearing	Distance	Description
A	N 70° W	10.6'	Mag nail and shiner set over old nail 1.1' above grade on the south side of a 5.5" maple with a MCSO sign found 4.0' above grade on the southeast side of the tree
B	S 41° W	9.2'	Mag nail and shiner set in hack 0.7' above grade on the northwest side of the northerly 9.5" dbh trunk of a twin sugar maple (the 2nd trunk has a 10.3" dbh)
C	N 48° E	11.0'	Mag nail and shiner set in hack 1.1' above grade on the southeast side of a 19.5" maple

PHOTO IDENTIFIED: Photo Date: 4/4/2018



Photo Orientation & Description: Looking south at CICr_E07



Photo Orientation & Description: Looking northeast at CICr_E07



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 1 of 3

MONUMENT RECORD

Corner ID: **CICr_E07**

Quarter Corner

Sections 07 & 08- T07N-R01W, 2nd P.M.
Clear Creek Township, Monroe County, Indiana




Photo Orientation & Description: Looking W-NW at CICr_E07



Photo Orientation & Description: Looking south at CICr_E07

FIELD PERSONNEL:

Field Date: 4/4/2018 & 2/21/2019 By: R.Oser & E.Smithram Project #: T07NR01W08 Field Book: 51/59 & 52/79 Notes:

EXISTING SURVEY HISTORY

Include as much detail and history of the corner as known at the time of perpetuation

ORIGINAL GOVERNMENT SURVEY:

Year Surveyed: 1815 By: Arthur Henrie

Where filed or recorded: MCSO Original Survey Book page 30

Original monument: 1/4 Section Post

Bearing Trees or Reference Monuments:

Species	Dia.	Bearing	Distance
Beech	7"	S 13° E	4 lks
Beech	6"	N 24° W	22 lks

SUBSEQUENT CORNER RESTORATION:

Date Surveyed: 10/21/1842 By: James Spencer, MCS

Where filed or recorded: LSB1, pg 78 RSID001083

Original monument: not indicated, no new witnesses

Bearing Trees or Reference Monuments:

Species	Dia.	Bearing	Distance

SUBSEQUENT CORNER RESTORATION:

Date Surveyed: 3/2/1865 By: James Spencer, MCS

Where filed or recorded: LSB2, pg 121 RSID002291

Original monument: not indicated, no new witnesses

Notes:

SUBSEQUENT CORNER RESTORATION:

Date Surveyed: 3/13/2006 By: Kevin Enright, MCS

Where filed or recorded: Monument Record

Original monument: no, found cut limestone w/ drill hole

Notes: See archived Monument Record

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND:

Include, search area or areas, search procedure, etc.

Date of Search: 4/4/2018 By: R.Oser & E.Smithram Monument Found: Cut limestone with drill hole BTs or Reference Objects Found: No original reference objects found Notes: We raked the area surrounding the stone in search of the brass tablet that was likely part of the monument when it was set, but we did not find it.

OTHER SURVEY HISTORY:

Include details such as surveyor name, date, recording info, monument description, etc.

A monument is depicted at this corner on a boundary survey for Indiana Limestone by A. Farewell dated 1/22/1929, on file in the Monroe County Surveyor's Office as Reference Survey ID000521. The found limestone is of the same type as other stones that were set for Indiana Limestone during this time period. The Indiana Limestone survey does not depict an old stone found at this corner.

The found limestone was accepted by Lee Utt on his 8/5/1983 survey for Ora Shields on file as Reference Survey ID001110 and by Bernie Guerretaz on his 3/6/2006 survey for Tammy Blevins recorded as Instrument Number 2006006214. Kevin Enright witnessed the limestone on 3/13/2006 and it was accepted by the Monroe County Surveyor Review Board on 6/16/2006.

OTHER EVIDENCE: Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.

The stone is on the north side of a pine grove, ~250' north of an east/west gravel drive and ~330' northwest of the northwest garage corner of 622 W Chumley Road. East/west barbed wire fence remains were found 4.5 feet north of the limestone.

MONUMENT PRESERVATION:

Describe work done to preserve existing monument.

A 5-foot t-post was set 0.45 feet south of the center of the stone, with a Monroe County "PROTECT NEARBY SURVEY MARKER" sign attached 1.9 feet above grade facing north. A 1" magnet was placed in the drill hole, orange flagging was tied around the stone



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us


Page 2 of 3

MONUMENT RECORD

Corner ID: CICr_E07

Quarter Corner

Sections 07 & 08- T07N-R01W, 2nd P.M.
Clear Creek Township, Monroe County, Indiana

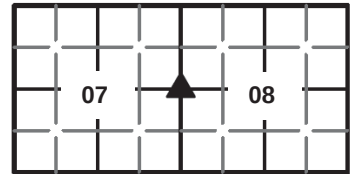

and the stone was painted orange.

THEORY OF LOCATION: *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*
The stone was accepted as the best evidence of the corner with no associated uncertainty.

GEODETIC COORDINATES: *Northing:* 1387525', *Easting:* 3103067'

BASIS OF GEODETIC COORDINATES: The basis of bearings is Grid North System NAD83 (2011)/Indiana West NAVD 88, Epoch 2010.0000, geoid12b_conus.db3, US Survey Feet. Tied to NSRS using the JAVAD GNSS Data Online Processing Service (DPOS) to post-process static observations collected with a Javad Triumph 2 base. Positional values of this corner were determined from static GNSS and RTK GNSS (Javad Triumph LS Rover) observation.

This document is not complete without the associated Corner Perpetuation plat and report of survey for Section 08-T07N-R01W by Rachel Oser of the Monroe County Surveyor's Office dated April 15, 2019 and recorded as Instrument Number 2019004835 in the office of the Monroe County Recorder.

CERTIFICATIONS:



Rachel Oser

Date: 4/16/2019
Rachel Oser, State of Indiana
Professional Surveyor
No.21100022



Trohn Enright-Randolph

Date: 4/16/2019
Trohn Enright-Randolph
Monroe County Surveyor



Accepted by the Monroe
County Surveyor Review
Board on 4/16/2019



MONUMENT RECORD
State of Indiana - County of Monroe

Section: 8


Township: 7 North

Range: 1 West

Corner ID: ClCr E-07


Monument Description & Remarks: Limestone, height; 0.63ft, length; 0.65ft, width; 0.65ft, with hole in stone where Brass monument is missing. Survey Sign 4.5ft A.G. at Pt. (D).

References On File: Bledsoe Riggert & Guerrettaz survey, Blevins Minor Subdivision, on file in surveyor's office.

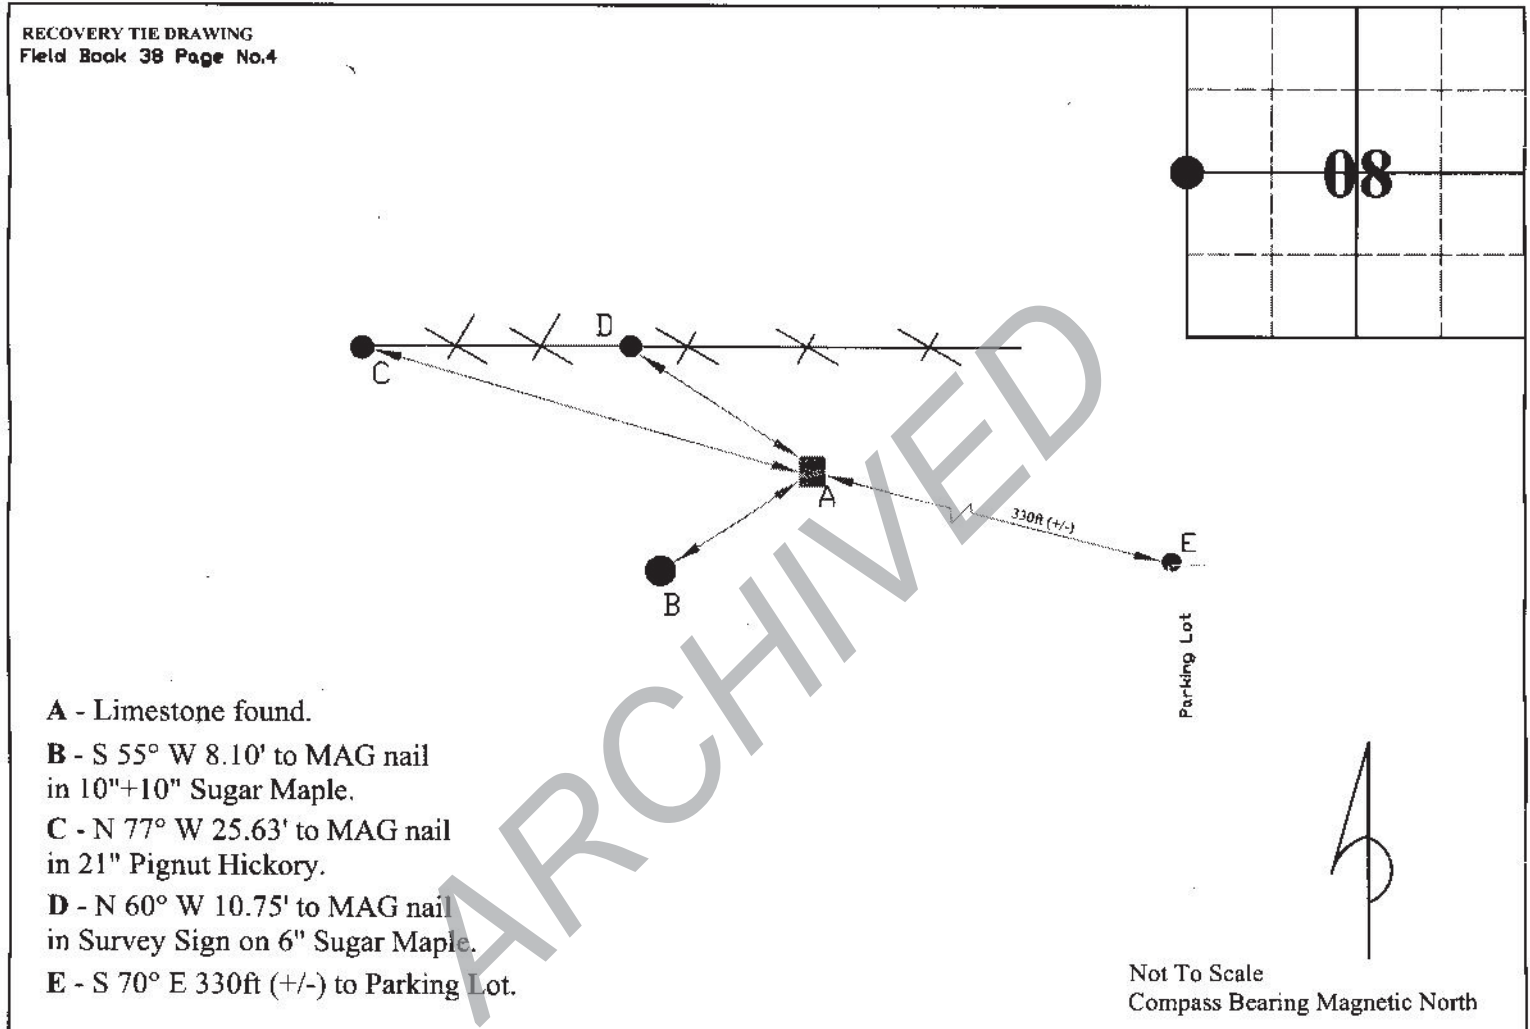

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of Sections 12-11 of the Indiana Code; and the above data is given under my hand and seal this 13th day of March, 2006.

Kevin P. Enright



Administered by the Monroe County Surveyor Review Board

Date: 6/16/06

